# AIR LINEAR 9 W

Glare-free 3000 K track light, white

DK/EU-5303-WH · Slim track light AIR LINEAR, 9W, 3000K, white color



| | |
|---|---|
| POWER<br>**9 W** | LUMINOUS FLUX<br>**400 lm** |
| COLOUR TEMPERATURE<br>**3000 K** | COLOUR RENDERING<br>**CRI ≥ 90** |
| BEAM ANGLE<br>**120°** | VOLTAGE<br>**48 V** |
| CONTROL<br>**On/Off** | PROTECTION<br>**IP20** |
| DIMENSIONS<br>**230 × 26 × 60 mm** | FINISH<br>**White** |
| WARRANTY<br>**3 years** | EAN<br>**3831166001887** |

**GLARE-FREE**
The LEDs are recessed in the body, so the light does not dazzle.

**CRI ≥ 90**
Colours and materials look natural.

**6 MM THIN TRACK**
The AIR track is 18 mm wide and only 6 mm high, made for finished ceilings.

**48 V LOW VOLTAGE**
Safe to touch and easy to reposition.

AIR LINEAR - series of track lights for general lighting. Thanks to a matte diffuser, the lights have a broad 120° beam angle, ensuring high visual comfort and eliminate glare. The series employs OSRAM LEDs with a high color rendering index CRI > 90. Fixtures click into the track and lock with mechanical latches.

## OVERALL DIMENSIONS, MM

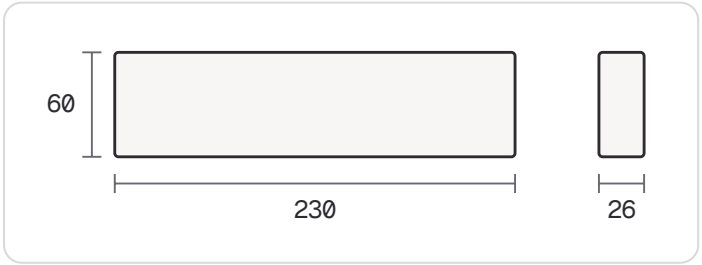


## PART OF DENKIRS AIR

### 48 V low voltage
Safe to touch. A 150 W surface-mount driver powers the line.

### Surface mounting
Fix the track onto the finished ceiling — no chasing, no recess, no re-plastering.

### Click in, lock, move
Fixtures click into the track and lock with mechanical latches. Reposition them whenever the layout changes.

## TECHNICAL DATA

### LIGHT

| | |
|---|---|
| Power | 9 W |
| Luminous flux | 400 lm |
| Colour temperature | 3000 K |
| Light colour | Warm white |
| Colour rendering (CRI) | ≥ 90 |
| Beam angle | 120° |
| Light source | Built-in LED |

### POWER & CONTROL

| | |
|---|---|
| Voltage | 48 V |
| Control | On/Off |

### DIMENSIONS

| | |
|---|---|
| Length | 230 mm |
| Width | 26 mm |
| Height | 60 mm |

### BUILD & ORDER

| | |
|---|---|
| Finish | White |
| Material | Aluminum |
| Protection | IP20 |
| Warranty | 3 years |
| Article | DK/EU-5303-WH |
| EAN barcode | 3831166001887 |
| Units per box | 30 pcs |

## LIGHT

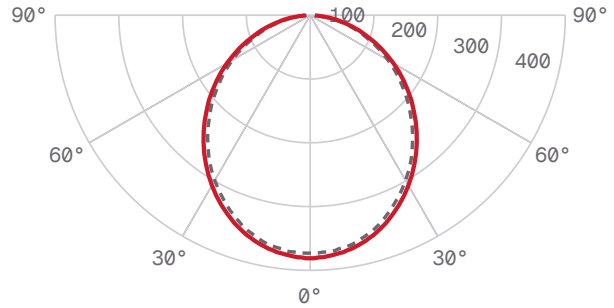


Light distribution, cd/klm: C0–C180 solid red, C90–C270 dashed.

## WORKS WITH

**TR/EU-5201-WH** Slim track AIR BASE, 1 M, 48V DC, WHITE color

**TR/EU-5202-WH** Slim track AIR BASE, 2M, 48V DC, WHITE color

**TR/EU-5220-WH** Surface mounting power unit (driver) for track AIR BASE,48V DC 150W, white color

**TR/EU-5215-WH** Power supply for track AIR BASE, 48V DC, White color

**TR/EU-5230-WH** Straight connector for track AIR BASE, white color

**TR/EU-5231-WH** Corner connector 90° for track AIR BASE, white color

**TR/EU-5232-WH** Corner connector 90° wall-ceiling for track AIR BASE, white color

**TR/EU-5233-WH** T-type connector for track AIR BASE, white color