AIR GRILL 12 W

Glare-free tunable white track light, black

DK/EU-5368-BK · Slim track light AIR GRILL, 12W, 2700-6500K, black color



POWER 12 W	LUMINOUS FLUX 872 lm
COLOUR TEMPERATURE 2700–6500 K	COLOUR RENDERING CRI ≥ 90
BEAM ANGLE 36°	VOLTAGE 48 V
CONTROL Wi-Fi/Bluetooth	PROTECTION IP20
DIMENSIONS 230 × 26 × 60 mm	FINISH Black
WARRANTY 3 years	EAN 3831166003560

GLARE-FREE
The LEDs are recessed in the body, so the light does not dazzle.


TUNABLE WHITE 2700-6500 K
Warm light for the evening, crisp daylight for work.

SMART CONTROL
Control it from the app, by voice or from a wall panel.

OSRAM LEDS, CRI ≥ 90
Colours and materials look natural.

The Air Smart grill is a series of smart track lights for accent lighting with a narrow 36° radiation angle. The light body is only 26 mm wide. OSRAM LEDs with a high color rendering index CRI>90. Recessed LEDs eliminate the blinding effect. Fixtures click into the AIR BASE series track and lock with mechanical latches. Adjustable brightness and color temperature of 2700-6500K. Remote control via voice, app, and panel.

OVERALL DIMENSIONS, MM

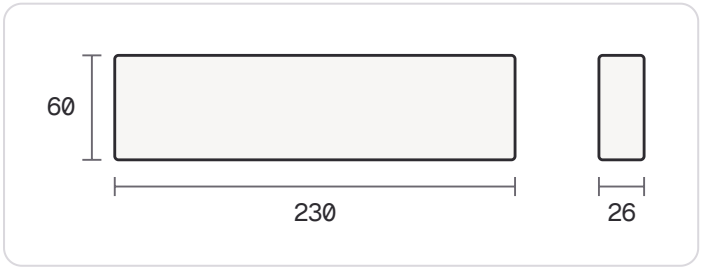

PART OF DENKIRS AIR

48 V low voltage
Safe to touch. A 150 W surface-mount driver powers the line.

Surface mounting
Fix the track onto the finished ceiling — no chasing, no recess, no re-plastering.

Click in, lock, move
Fixtures click into the track and lock with mechanical latches. Reposition them whenever the layout changes.

TECHNICAL DATA

LIGHT

Power	12 W
Luminous flux	872 lm (black Anti dazzle cover)
Colour temperature	2700–6500 K
Light colour	White adjustable
Colour rendering (CRI)	≥ 90
Beam angle	36°
Dimmable	Yes
LED	OSRAM LED
Light source	Built-in LED

POWER & CONTROL

Voltage	48 V
Control	Wi-Fi/Bluetooth


DIMENSIONS

Length	230 mm
Width	26 mm
Height	60 mm


BUILD & ORDER

Finish	Black
Material	Aluminum
Protection	IP20
Warranty	3 years
Article	DK/EU-5368-BK
EAN barcode	3831166003560
Units per box	30 pcs

LIGHT

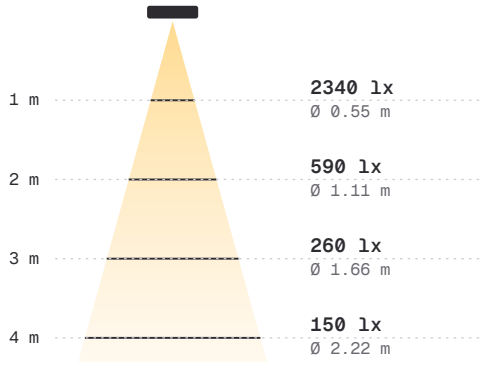

Distance · illuminance at the centre · spot diameter at half intensity. Photometric file measured on DK/EU-5335 (the same luminaire), scaled to 872 lm.

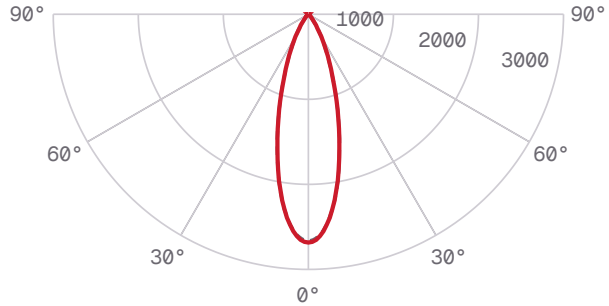

Light distribution, cd/klm: C0–C180 solid red, C90–C270 dashed.

WORKS WITH

TR/EU-5201-BK Slim track AIR BASE, 1 M, 48V DC, black color

TR/EU-5202-BK Slim track AIR BASE, 2 M, 48V DC, black color

TR/EU-5220-BK Surface mounting power unit (driver) for track AIR BASE,48V DC 150W, black color

TR/EU-5215-BK Power supply for track AIR BASE, 48V DC, black color

TR/EU-5230-BK Straight connector for track AIR BASE, black color

TR/EU-5231-BK Corner connector 90° for track AIR BASE, black color

TR/EU-5232-BK Corner connector 90° wall-ceiling for track AIR BASE, black color

TR/EU-5233-BK T-type connector for track AIR BASE, black color