AIR SPOT 12 W

Tunable white track light, white

DK/EU-5371-WH · Slim track light AIR SPOT, 12W, 2700-6500K, white color



POWER 12 W	LUMINOUS FLUX 741 lm
COLOUR TEMPERATURE 2700–6500 K	COLOUR RENDERING CRI ≥ 90
BEAM ANGLE 24°	VOLTAGE 48 V
CONTROL Wi-Fi/Bluetooth	PROTECTION IP20
DIMENSIONS 50 × 160 mm	FINISH White
WARRANTY 3 years	EAN 3831166003539

TUNABLE WHITE 2700-6500 K
Warm light for the evening, crisp daylight for work.

SMART CONTROL
Control it from the app, by voice or from a wall panel.

OSRAM LEDS, CRI ≥ 90
Colours and materials look natural.

6 MM THIN TRACK
The AIR track is 18 mm wide and only 6 mm high, made for finished ceilings.

The Air Smart Spot is a series of smart track lights for accent lighting. The lampshade is made in the form of a ribbed cylinder, which creates a play of shadows on the surface of the lamp, giving it volume and decorativeness. OSRAM LEDs with a high color rendering index CRI>90. Fixtures click into the AIR BASE series track and lock with mechanical latches. Adjustable brightness and color temperature of 2700-6500K. Remote control via voice, app, and panel.

OVERALL DIMENSIONS, MM



PART OF DENKIRS AIR

48 V low voltage
Safe to touch. A 150 W surface-mount driver powers the line.

Surface mounting
Fix the track onto the finished ceiling — no chasing, no recess, no re-plastering.

Click in, lock, move
Fixtures click into the track and lock with mechanical latches. Reposition them whenever the layout changes.

TECHNICAL DATA

LIGHT

Power	12 W
Luminous flux	741 lm
Colour temperature	2700–6500 K
Light colour	White adjustable
Colour rendering (CRI)	≥ 90
Beam angle	24°
Dimmable	Yes
LED	OSRAM LED
Light source	Built-in LED

POWER & CONTROL

Voltage	48 V
Control	Wi-Fi/Bluetooth

DIMENSIONS

Width	50 mm
Height	160 mm
Diameter	50 mm
Rotatable	Yes

BUILD & ORDER

Finish	White
Material	Aluminum
Protection	IP20
Warranty	3 years
Article	DK/EU-5371-WH
EAN barcode	3831166003539
Units per box	30 pcs

LIGHT

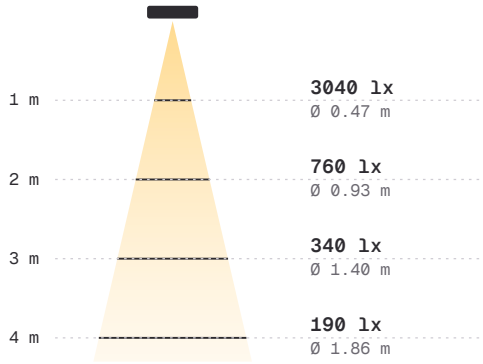

Distance · illuminance at the centre · spot diameter at half intensity. Photometric file measured on DK/EU-5341 (the same luminaire), scaled to 741 lm.

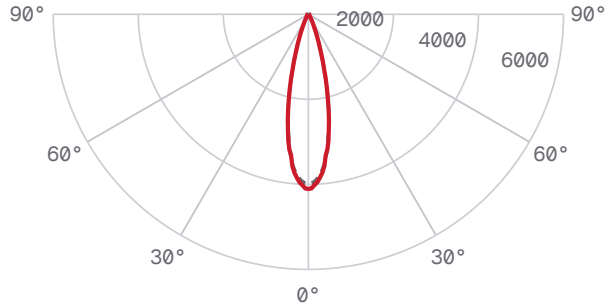

Light distribution, cd/klm: C0–C180 solid red, C90–C270 dashed.

WORKS WITH

TR/EU-5201-WH Slim track AIR BASE, 1 M, 48V DC, WHITE color

TR/EU-5202-WH Slim track AIR BASE, 2M, 48V DC, WHITE color

TR/EU-5220-WH Surface mounting power unit (driver) for track AIR BASE,48V DC 150W, white color

TR/EU-5215-WH Power supply for track AIR BASE, 48V DC, White color

TR/EU-5230-WH Straight connector for track AIR BASE, white color

TR/EU-5231-WH Corner connector 90° for track AIR BASE, white color

TR/EU-5232-WH Corner connector 90° wall-ceiling for track AIR BASE, white color

TR/EU-5233-WH T-type connector for track AIR BASE, white color