AIR HANG 5 W

Tunable white track pendant, white

DK/EU-5375-WH · Slim pendant track light AIR HANG, 5W, 2700-6500K, white color



POWER **5 W**	LUMINOUS FLUX **257 lm**
COLOUR TEMPERATURE **2700–6500 K**	COLOUR RENDERING **CRI ≥ 90**
BEAM ANGLE **24°**	VOLTAGE **48 V**
CONTROL **Wi-Fi/Bluetooth**	PROTECTION **IP20**
DIMENSIONS **35 × 257 mm**	FINISH **White**
WARRANTY **3 years**	EAN **3831166003591**

TUNABLE WHITE 2700-6500 K
Warm light for the evening, crisp daylight for work.

SMART CONTROL
Control it from the app, by voice or from a wall panel.

OSRAM LEDS, CRI ≥ 90
Colours and materials look natural.

6 MM THIN TRACK
The AIR track is 18 mm wide and only 6 mm high, made for finished ceilings.

The Air Smart Hang is a series of smart track lights for accent lighting. The series features 3 different lampshade designs. OSRAM LEDs with a high color rendering index CRI>90. Fixtures click into the AIR BASE series track and lock with mechanical latches. Adjustable brightness and color temperature of 2700-6500K. Remote control via voice, app, and panel.

OVERALL DIMENSIONS, MM



PART OF DENKIRS AIR

48 V low voltage
Safe to touch. A 150 W surface-mount driver powers the line.

Surface mounting
Fix the track onto the finished ceiling — no chasing, no recess, no re-plastering.

Click in, lock, move
Fixtures click into the track and lock with mechanical latches. Reposition them whenever the layout changes.

TECHNICAL DATA

LIGHT

Power	5 W
Luminous flux	257 lm
Colour temperature	2700–6500 K
Light colour	White adjustable
Colour rendering (CRI)	≥ 90
Beam angle	24°
Dimmable	Yes
LED	OSRAM LED
Light source	Built-in LED

POWER & CONTROL

Voltage	48 V
Control	Wi-Fi/Bluetooth

DIMENSIONS

Width	35 mm
Height	257 mm
Diameter	35 mm

BUILD & ORDER

Finish	White
Material	Aluminum
Protection	IP20
Warranty	3 years
Article	DK/EU-5375-WH
EAN barcode	3831166003591
Units per box	9 pcs

LIGHT

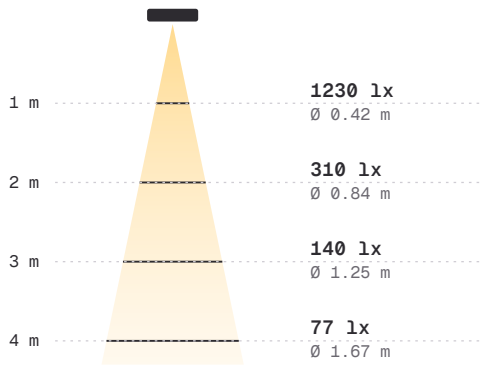

Distance · illuminance at the centre · spot diameter at half intensity.
Light distribution measured on DK/EU-5345, scaled to 257 lm.

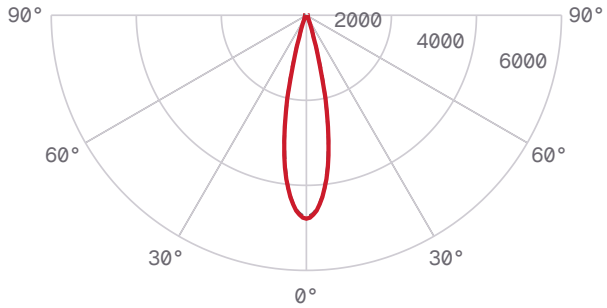

Light distribution, cd/klm: C0–C180 solid red, C90–C270 dashed.

WORKS WITH

TR/EU-5201-WH Slim track AIR BASE, 1 M, 48V DC, WHITE color

TR/EU-5202-WH Slim track AIR BASE, 2M, 48V DC, WHITE color

TR/EU-5220-WH Surface mounting power unit (driver) for track AIR BASE,48V DC 150W, white color

TR/EU-5215-WH Power supply for track AIR BASE, 48V DC, White color

TR/EU-5230-WH Straight connector for track AIR BASE, white color

TR/EU-5231-WH Corner connector 90° for track AIR BASE, white color

TR/EU-5232-WH Corner connector 90° wall-ceiling for track AIR BASE, white color

TR/EU-5233-WH T-type connector for track AIR BASE, white color