SHINE SPOT 8 W

3000 K track light, dark nickel

DK/EU-5744-DN · Shine Track light, SPOT 3000 series, D40*H200*L1500mm wire, LED, 48V DC, 8W, RA≥90, 3000K, IP20, dark nickel color, aluminum



POWER **8 W**	LUMINOUS FLUX **500 lm**
COLOUR TEMPERATURE **3000 K**	COLOUR RENDERING **CRI ≥ 90**
BEAM ANGLE **36°**	VOLTAGE **48 V**
CONTROL **On/Off**	PROTECTION **IP20**
DIMENSIONS **200 × 40 × 1700 mm**	FINISH **Dark nickel**
WARRANTY **3 years**	EAN **3831166002143**

CRI ≥ 90
Colours and materials look natural.

DARK NICKEL FINISH
The same finish across tracks, spots, wall lights and even the driver.

INTERCHANGEABLE LENS
Swap the 36° lens for a 15° one when you need a tighter beam.

48 V LOW VOLTAGE
Safe to touch and easy to reposition.

SHINE SPOT is a pendant light with a built-in LED for the SHINE track system. The light body is made of aluminum, which effectively dissipates heat, and has a matte textured surface. Equipped with LEDs of 8W power with a beam angle of 36° and a high color rendering index of CRI>90. Color temperature of 3000K. Simple installation anywhere on the track. Available in satin brass.

OVERALL DIMENSIONS, MM



PART OF DENKIRS SHINE

One finish, one scheme
Satin brass or dark nickel across tracks, spots, wall lights, downlights — and even the driver.

Base or Hide
Base mounts on the surface or on suspensions; Hide recesses flush into 12.5 mm plasterboard.

48 V low voltage
Safe to touch. A 150 W external driver feeds the track, with power inputs for surface and suspended mounting.

TECHNICAL DATA

LIGHT

Power	8 W
Luminous flux	500 lm
Colour temperature	3000 K
Light colour	Warm white
Colour rendering (CRI)	≥ 90
Beam angle	36°
Dimmable	No
Light source	Built-in LED
Base	Built-in LED

POWER & CONTROL

Voltage	48 V
Control	On/Off
Phases	single phase

DIMENSIONS

Length	200 mm
Width	40 mm
Height	1700 mm
Diameter	40 mm
Cord length	1500 mm
Height adjustable	Yes

BUILD & ORDER

Finish	Dark nickel
Material	Aluminum
Protection	IP20
Warranty	3 years
Article	DK/EU-5744-DN
EAN barcode	3831166002143
Units per box	20 pcs

LIGHT

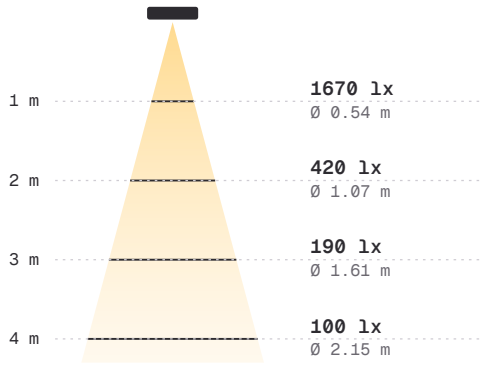

Distance · illuminance at the centre · spot diameter at half intensity.
Photometric file, 500 lm.

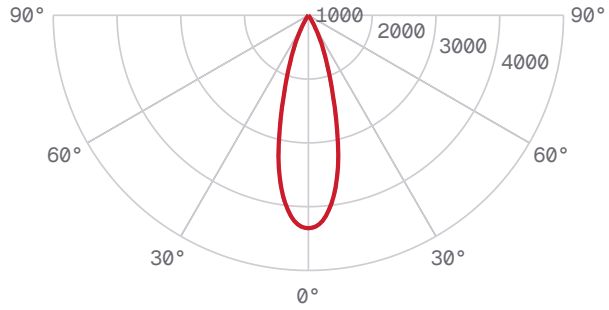

Light distribution, cd/klm: C0–C180 solid red, C90–C270 dashed.

WORKS WITH

TR/EU-5710-DN Track Shine, Base series, 1 M, 48V DC, IP20, dark nickel color, aluminum

TR/EU-5715-DN Track Shine, Base series, 1.5 M, 48V DC, IP20, dark nickel color, aluminum

TR/EU-5721-DN Power supply, Shine track system, Base series, 48V DC, IP20, dark nickel color, aluminum

TR/EU-5735-DN Low profile end cap, for use without decorative track cover, Shine track system, Base series, set of 2 pieces, dark nickel color, aluminum