# SHINE GRILL 10 W

3000 K track light, dark nickel

DK/EU-5771-DN · Shine Track light, GRILL 3000 series, L231*W19*H27, LED, 48V DC, 10W, RA≥90, 3000K, IP20, dark nickel color, aluminum



| | |
|---|---|
| POWER<br>**10 W** | LUMINOUS FLUX<br>**790 lm** |
| COLOUR TEMPERATURE<br>**3000 K** | COLOUR RENDERING<br>**CRI ≥ 90** |
| BEAM ANGLE<br>**36°** | VOLTAGE<br>**48 V** |
| CONTROL<br>**On/Off** | PROTECTION<br>**IP20** |
| DIMENSIONS<br>**231 × 19 × 27 mm** | FINISH<br>**Dark nickel** |
| WARRANTY<br>**3 years** | EAN<br>**3831166002020** |

**CRI ≥ 90**
Colours and materials look natural.

**DARK NICKEL FINISH**
The same finish across tracks, spots, wall lights and even the driver.

**48 V LOW VOLTAGE**
Safe to touch and easy to reposition.

SHINE GRILL is light with a built-in LED for the SHINE track system. The light body is made of aluminum, which effectively dissipates heat, and has a matte textured surface. Equipped with LEDs of 10W power with a beam angle of 36° and a high color rendering index of CRI>90. Color temperature of 3000K. Simple installation anywhere on the track. Available in satin brass.

## OVERALL DIMENSIONS, MM

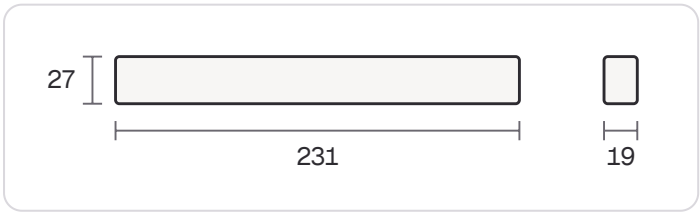


## PART OF DENKIRS SHINE

### One finish, one scheme
Satin brass or dark nickel across tracks, spots, wall lights, downlights — and even the driver.

### Base or Hide
Base mounts on the surface or on suspensions; Hide recesses flush into 12.5 mm plasterboard.

### 48 V low voltage
Safe to touch. A 150 W external driver feeds the track, with power inputs for surface and suspended mounting.

## TECHNICAL DATA

### LIGHT

| | |
|---|---|
| Power | 10 W |
| Luminous flux | 790 lm |
| Colour temperature | 3000 K |
| Light colour | Warm white |
| Colour rendering (CRI) | ≥ 90 |
| Beam angle | 36° |
| Dimmable | No |
| Light source | Built-in LED |
| Base | Built-in LED |

### POWER & CONTROL

| | |
|---|---|
| Voltage | 48 V |
| Control | On/Off |
| Phases | single phase |

### DIMENSIONS

| | |
|---|---|
| Length | 231 mm |
| Width | 19 mm |
| Height | 27 mm |

### BUILD & ORDER

| | |
|---|---|
| Finish | Dark nickel |
| Material | Aluminum |
| Protection | IP20 |
| Warranty | 3 years |
| Article | DK/EU-5771-DN |
| EAN barcode | 3831166002020 |
| Units per box | 50 pcs |

## LIGHT

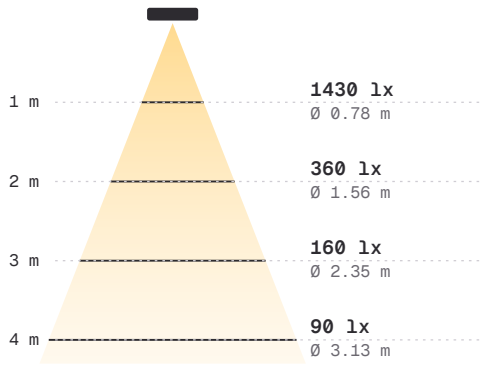


Distance · illuminance at the centre · spot diameter at half intensity.
Photometric file, 790 lm.

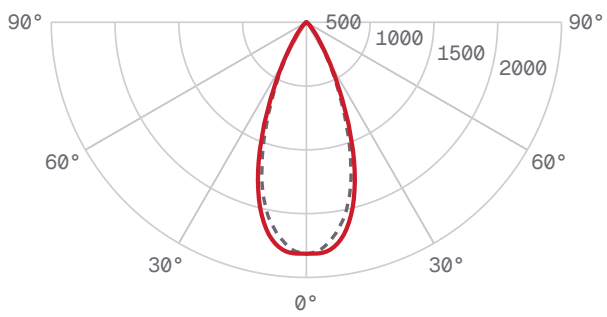


Light distribution, cd/klm: C0–C180 solid red, C90–C270 dashed.

## WORKS WITH

**TR/EU-5710-DN** Track Shine, Base series, 1 M, 48V DC, IP20, dark nickel color, aluminum

**TR/EU-5715-DN** Track Shine, Base series, 1.5 M, 48V DC, IP20, dark nickel color, aluminum

**TR/EU-5721-DN** Power supply, Shine track system, Base series, 48V DC, IP20, dark nickel color, aluminum

**TR/EU-5735-DN** Low profile end cap, for use without decorative track cover, Shine track system, Base series, set of 2 pieces, dark nickel color, aluminum