SHINE SPOT 8 W

Tunable white track light, dark nickel

DK/EU-5944-DN · SHINE SPOT ZigBee track light, 48V, 8W, 2700-6000K, IP20, dark nickel, aluminum



POWER **8 W**	LUMINOUS FLUX **540 lm**
COLOUR TEMPERATURE **2700–6000 K**	COLOUR RENDERING **CRI ≥ 90**
BEAM ANGLE **36°**	VOLTAGE **48 V**
CONTROL **ZigBee**	PROTECTION **IP20**
DIMENSIONS **1500 × 40 × 1500 mm**	FINISH **Dark nickel**
WARRANTY **3 years**	EAN **3831166004086**

TUNABLE WHITE 2700-6000 K
Warm light for the evening, crisp daylight for work.

SMART CONTROL
ZigBee control.

LEDVANCE LEDS, CRI ≥ 90
Colours and materials look natural.

DARK NICKEL FINISH
The same finish across tracks, spots, wall lights and even the driver.

A stylish track luminaire for the SHINE system that combines a minimalist design with smart ZigBee control. It helps create both soft evening light and bright task lighting thanks to adjustable 2700–6000 K. An excellent choice for modern interiors, offices, and commercial spaces.

OVERALL DIMENSIONS, MM



PART OF DENKIRS SHINE

One finish, one scheme

Satin brass or dark nickel across tracks, spots, wall lights, downlights — and even the driver.

Base or Hide

Base mounts on the surface or on suspensions; Hide recesses flush into 12.5 mm plasterboard.

48 V low voltage

Safe to touch. A 150 W external driver feeds the track, with power inputs for surface and suspended mounting.

TECHNICAL DATA

LIGHT

Power	8 W
Luminous flux	540 lm
Colour temperature	2700–6000 K
Light colour	White adjustable
Colour rendering (CRI)	≥ 90
Beam angle	36°
LED	Ledvance
Light source	Built-in LED
Base	Built-in LED

POWER & CONTROL

Voltage	48 V
Control	ZigBee
Phases	single phase

DIMENSIONS

Length	1500 mm
Width	40 mm
Height	1500 mm
Diameter	40 mm
Cord length	1500 mm
Height adjustable	yes
Number of shades	1

BUILD & ORDER

Finish	Dark nickel
Material	Aluminum
Protection	IP20
Warranty	3 years
Article	DK/EU-5944-DN
EAN barcode	3831166004086
Units per box	30 pcs

LIGHT

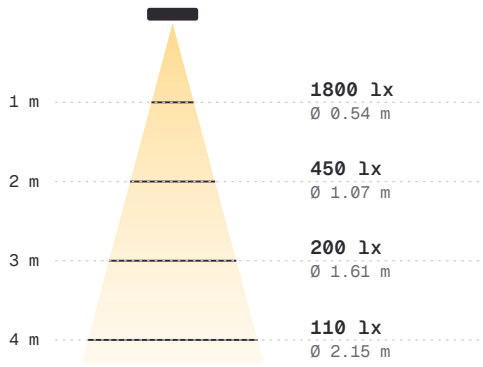

Distance · illuminance at the centre · spot diameter at half intensity.
Light distribution measured on DK/EU-5744, scaled to 540 lm.

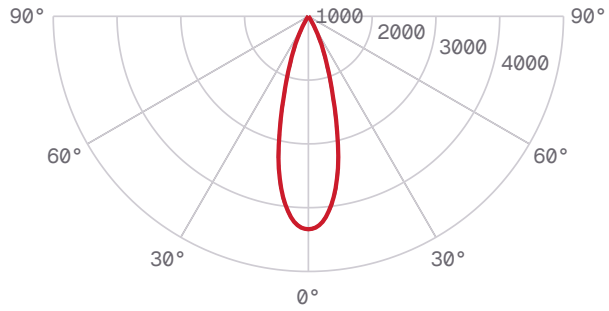

Light distribution, cd/klm: C0–C180 solid red, C90–C270 dashed.

WORKS WITH

TR/EU-5710-DN Track Shine, Base series, 1 M, 48V DC, IP20, dark nickel color, aluminum

TR/EU-5715-DN Track Shine, Base series, 1.5 M, 48V DC, IP20, dark nickel color, aluminum

TR/EU-5721-DN Power supply, Shine track system, Base series, 48V DC, IP20, dark nickel color, aluminum

TR/EU-5735-DN Low profile end cap, for use without decorative track cover, Shine track system, Base series, set of 2 pieces, dark nickel color, aluminum