SHINE GRILL 10 W

Tunable white track light, dark nickel

DK/EU-5971-DN · Track light SHINE GRILL ZigBee, 48V, 10W, 2700-6000K, IP20, dark nickel, aluminum



POWER **10 W**	LUMINOUS FLUX **910 lm**
COLOUR TEMPERATURE **2700–6000 K**	COLOUR RENDERING **CRI ≥ 90**
BEAM ANGLE **36°**	VOLTAGE **48 V**
CONTROL **ZigBee**	PROTECTION **IP20**
DIMENSIONS **232 × 19 × 27 mm**	FINISH **Dark nickel**
WARRANTY **3 years**	EAN **3831166004147**

TUNABLE WHITE 2700-6000 K
Warm light for the evening, crisp daylight for work.

SMART CONTROL
ZigBee control.

LEDVANCE LEDS, CRI ≥ 90
Colours and materials look natural.

DARK NICKEL FINISH
The same finish across tracks, spots, wall lights and even the driver.

SHINE GRILL ZigBee is a track luminaire with ZigBee control. It combines a modern design with expressive lighting, while the decorative grill makes the light more comfortable and visually neat. With an adjustable color temperature of 2700–6000 K, you can easily switch lighting scenarios: warm light for coziness, neutral light for everyday tasks, and cool light for focused work. Perfect for zoning and accent lighting in residential and commercial interiors.

OVERALL DIMENSIONS, MM

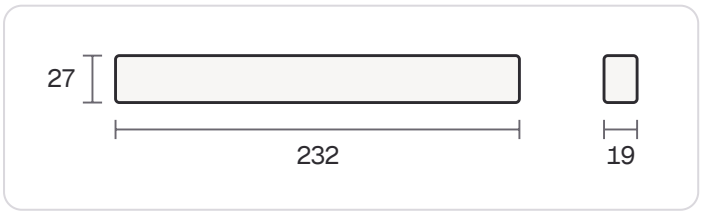

PART OF DENKIRS SHINE

One finish, one scheme
Satin brass or dark nickel across tracks, spots, wall lights, downlights — and even the driver.

Base or Hide
Base mounts on the surface or on suspensions; Hide recesses flush into 12.5 mm plasterboard.

48 V low voltage
Safe to touch. A 150 W external driver feeds the track, with power inputs for surface and suspended mounting.

TECHNICAL DATA

LIGHT

Power	10 W
Luminous flux	910 lm
Colour temperature	2700–6000 K
Light colour	White adjustable
Colour rendering (CRI)	≥90
Beam angle	36°
LED	Ledvance
Light source	Built-in LED
Base	Built-in LED

POWER & CONTROL

Voltage	48 V
Control	ZigBee
Phases	single phase

DIMENSIONS

Length	232 mm
Width	19 mm
Height	27 mm
Number of shades	1

BUILD & ORDER

Finish	Dark nickel
Material	Aluminum
Protection	IP20
Warranty	3 years
Article	DK/EU-5971-DN
EAN barcode	3831166004147
Units per box	50 pcs

LIGHT

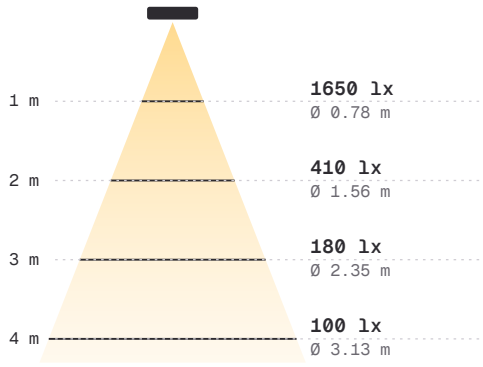

Distance · illuminance at the centre · spot diameter at half intensity.
Light distribution measured on DK/EU-5771, scaled to 910 lm.

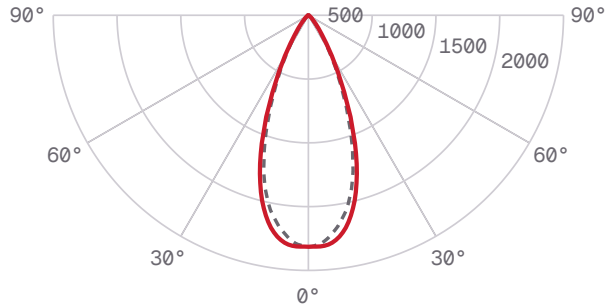

Light distribution, cd/klm: C0–C180 solid red, C90–C270 dashed.

WORKS WITH

TR/EU-5710-DN Track Shine, Base series, 1 M, 48V DC, IP20, dark nickel color, aluminum

TR/EU-5715-DN Track Shine, Base series, 1.5 M, 48V DC, IP20, dark nickel color, aluminum

TR/EU-5721-DN Power supply, Shine track system, Base series, 48V DC, IP20, dark nickel color, aluminum

TR/EU-5735-DN Low profile end cap, for use without decorative track cover, Shine track system, Base series, set of 2 pieces, dark nickel color, aluminum