SMART SPOT 9 W

Tunable white track light, matte gold

DK/EU-8008-BG · Spot series smart track light matte gold



POWER **9 W**	LUMINOUS FLUX **770 lm**
COLOUR TEMPERATURE **2700–6000 K**	COLOUR RENDERING **CRI ≥ 90**
BEAM ANGLE **24°**	VOLTAGE **220 V**
CONTROL **Wi-Fi/Bluetooth**	PROTECTION **IP20**
DIMENSIONS **220 × 40 × 1340 mm**	FINISH **Matte gold**
WARRANTY **3 years**	EAN **3831166000088**

TUNABLE WHITE 2700-6000 K
Warm light for the evening, crisp daylight for work.

SMART CONTROL
Control it by voice.

BRIDGELUX LEDS, CRI ≥ 90
Colours and materials look natural.

Model for accent lighting, has narrow beam angle (24°) Has variable brightness and color temperature in the range of 2700–6000 K. It is installed on the DENKIRS SMART track system. Adjustment and remote control of the lamp can be carried out via the touch panels DK/EU-7500-BK or DK/EU-7500-WH, remote control DK/EU-7300-BK or Wi-Fi converter DK/EU-7700-WF for smartphone control and the possibility of voice control assistants: Siri, Google Assistant.

OVERALL DIMENSIONS, MM



PART OF DENKIRS SMART

220 V, no driver

The track connects straight to the mains. No driver to size, no transformer to hide.

Four installation types

Surface, suspended, recessed in plasterboard — or SMART ONE for stretch ceilings.

Pairing, not wiring

Remotes, wall panels and the app connect over Bluetooth, Wi-Fi or Zigbee — no control cables to run.

TECHNICAL DATA

LIGHT

Power	9 W
Luminous flux	770 lm
Colour temperature	2700–6000 K
Light colour	White adjustable
Colour rendering (CRI)	≥90
Beam angle	24°
Dimmable	Yes
LED	LED Bridge Lux
Light source	Built-in LED

POWER & CONTROL

Voltage	220 V
Control	Wi-Fi/Bluetooth

DIMENSIONS

Length	220 mm
Width	40 mm
Height	1340 mm
Diameter	40 mm
Cord length	1000 mm
Height adjustable	Yes
Number of shades	1

BUILD & ORDER

Finish	Matte gold
Material	Plastic
Protection	IP20
Warranty	3 years
Article	DK/EU-8008-BG
EAN barcode	3831166000088
Units per box	10 pcs

LIGHT

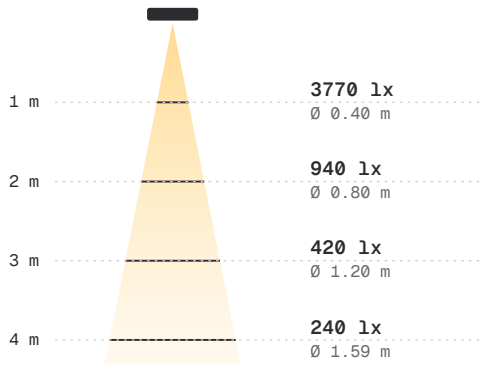

Distance · illuminance at the centre · spot diameter at half intensity.
Photometric file, 770 lm.

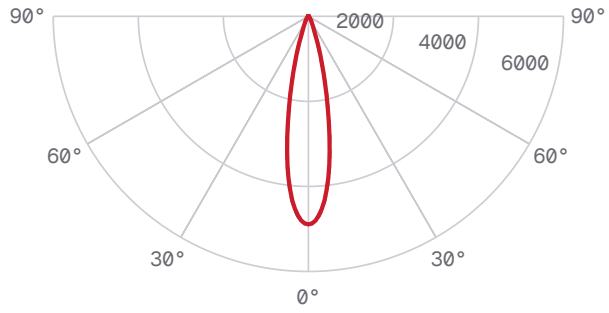

Light distribution, cd/klm: C0–C180 solid red, C90–C270 dashed.

WORKS WITH

TR/EU-2002-BK	Open decoration track SMART
TR/EU-2012-BK	Flush mounting track SMART
TR/EU-2100-BK	Power supply for track SMART