SMART LINEAR 18 W

Glare-free tunable white corner track light, black

DK/EU-8014-BK · Track light



POWER **18 W**	LUMINOUS FLUX **1520 lm**
COLOUR TEMPERATURE **3000–6000 K**	VOLTAGE **220 V**
CONTROL **Wi-Fi/Bluetooth**	PROTECTION **IP20**
DIMENSIONS **624 × 56 × 40 mm**	FINISH **Black**
WARRANTY **3 years**	

GLARE-FREE
The LEDs are recessed in the body, so the light does not dazzle.

TUNABLE WHITE 3000-6000 K
Warm light for the evening, crisp daylight for work.

SMART CONTROL
Wi-Fi/Bluetooth control.

A smart corner light from the SMART LINEAR series is designed for general lighting. Equipped with OSRAM LEDs and has a high color rendering index that ensures precise color shade transmission. The body is fully recessed into the track. Convenient and reliable mounting with mechanical latches. A matte diffuser provides a wide beam angle, ensuring a high level of visual comfort and eliminating glare. Adjustable brightness and color temperature ranging from 3000 to 6000 K.

OVERALL DIMENSIONS, MM

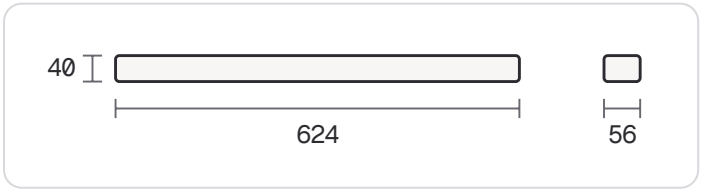

PART OF DENKIRS SMART

220 V, no driver

The track connects straight to the mains. No driver to size, no transformer to hide.

Four installation types

Surface, suspended, recessed in plasterboard — or SMART ONE for stretch ceilings.

Pairing, not wiring

Remotes, wall panels and the app connect over Bluetooth, Wi-Fi or Zigbee — no control cables to run.

TECHNICAL DATA

LIGHT

Power	18 W
Luminous flux	1520 lm
Colour temperature	3000–6000 K
Light colour	White adjustable
Dimmable	Yes
LED	OSRAM LED
Light source	Built-in LED

POWER & CONTROL

Voltage	220 V
Control	Wi-Fi/Bluetooth

DIMENSIONS

Length	624 mm
Width	56 mm
Height	40 mm
Number of shades	1

BUILD & ORDER

Finish	Black
Material	Aluminum
Protection	IP20
Warranty	3 years
Article	DK/EU-8014-BK
Units per box	10 pcs

LIGHT

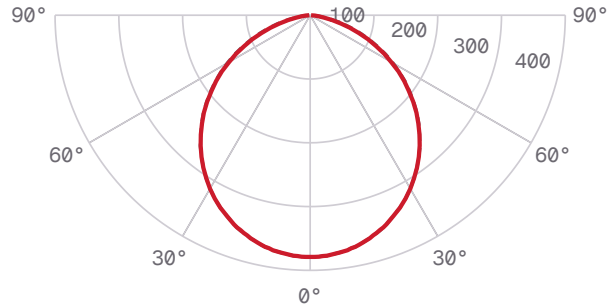

Light distribution, cd/klm: C0–C180 solid red, C90–C270 dashed.

WORKS WITH

TR/EU-2002-BK	Open decoration track SMART
TR/EU-2012-BK	Flush mounting track SMART
TR/EU-2100-BK	Power supply for track SMART