SMART track light 12 W

Tunable white ball-shaped track pendant, black

DK/EU-8056-BK · Track light



POWER 12 W	LUMINOUS FLUX 950 lm
COLOUR TEMPERATURE 3000–6000 K	COLOUR RENDERING CRI ≥ 80
BEAM ANGLE 120°	VOLTAGE 220 V
CONTROL Wi-Fi/Bluetooth	PROTECTION IP20
DIMENSIONS 110 × 1685 mm	FINISH Black
WARRANTY 3 years	

TUNABLE WHITE 3000-6000 K
Warm light for the evening, crisp daylight for work.

SMART CONTROL
Control it by voice or from a wall panel.

A smart suspended track light designed for general lighting. Adjustable in height with a maximum suspension length of 150 cm. The lightbody is ball-shaped and made of acrylic. It has a large beam angle of 120°. Controlled via a mobile application, control panel, remote control and voice assistant. Adjustable brightness and color temperature ranging from 3000 to 6000 K. Capable of setting light scenarios. The lamps are equipped with LEDs having a high color rendering index.

OVERALL DIMENSIONS, MM



PART OF DENKIRS SMART

220 V, no driver

The track connects straight to the mains. No driver to size, no transformer to hide.

Four installation types

Surface, suspended, recessed in plasterboard — or SMART ONE for stretch ceilings.

Pairing, not wiring

Remotes, wall panels and the app connect over Bluetooth, Wi-Fi or Zigbee — no control cables to run.

TECHNICAL DATA

LIGHT

Power	12 W
Luminous flux	950 lm
Colour temperature	3000–6000 K
Light colour	White adjustable
Colour rendering (CRI)	≥ 80
Beam angle	120°
Dimmable	Yes
Light source	Built-in LED

POWER & CONTROL

Voltage	220 V
Control	Wi-Fi/Bluetooth

DIMENSIONS

Width	110 mm
Height	1685 mm
Diameter	110 mm
Cord length	1500 mm
Height adjustable	Yes
Number of shades	1

BUILD & ORDER

Finish	Black
Material	Aluminum
Protection	IP20
Warranty	3 years
Article	DK/EU-8056-BK
Units per box	4 pcs

LIGHT

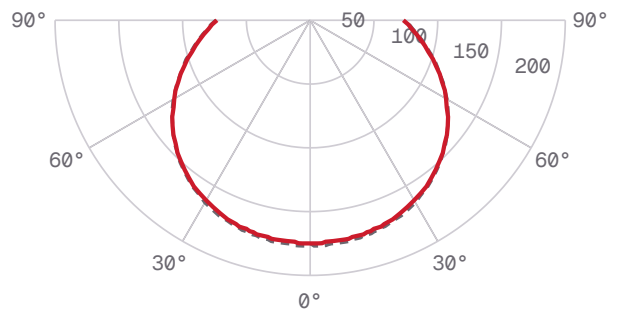

Light distribution, cd/klm: C0–C180 solid red, C90–C270 dashed.

WORKS WITH

TR/EU-2002-BK	Open decoration track SMART
TR/EU-2012-BK	Flush mounting track SMART
TR/EU-2100-BK	Power supply for track SMART