SMART RAY 18 W

Tunable white flexible track light, black

DK/EU-8060-BK · Track light

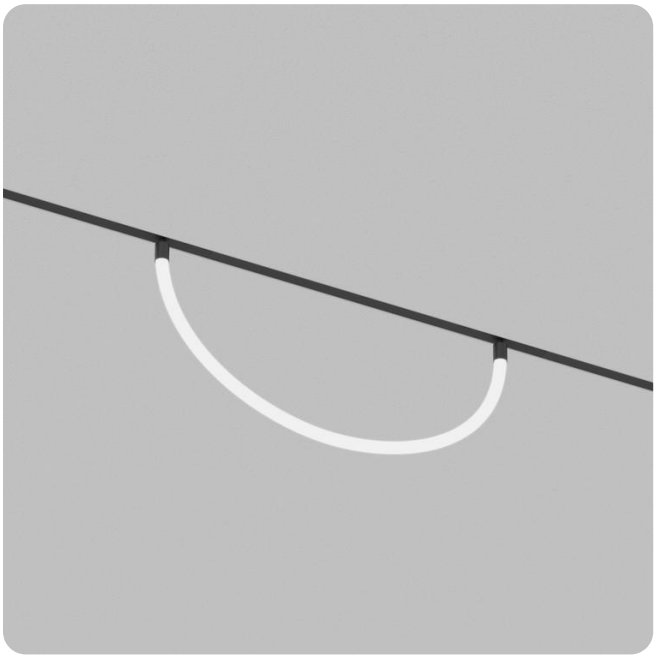

POWER **18 W**	LUMINOUS FLUX **1600 lm**
COLOUR TEMPERATURE **3000–6000 K**	COLOUR RENDERING **CRI ≥ 80**
BEAM ANGLE **320°**	VOLTAGE **220 V**
CONTROL **Wi-Fi/Bluetooth**	PROTECTION **IP20**
DIMENSIONS **1500 × 26 × 1600 mm**	FINISH **Black**
WARRANTY **3 years**	

TUNABLE WHITE 3000-6000 K
Warm light for the evening, crisp daylight for work.

SMART CONTROL
Control it by voice or from a wall panel.

A smart track light designed for general lighting. The body is designed as a flexible silicone tube with a length of 150 cm. Controlled via a mobile application, control panel, remote control and voice assistant. Adjustable brightness and color temperature ranging from 3000 to 6000 K. Capable of setting light scenarios. The lamps are equipped with LEDs having a high color rendering index. Easy and reliable installation in the DENKIRS SMART track using mechanical latches.

OVERALL DIMENSIONS, MM



PART OF DENKIRS SMART

220 V, no driver

The track connects straight to the mains. No driver to size, no transformer to hide.

Four installation types

Surface, suspended, recessed in plasterboard — or SMART ONE for stretch ceilings.

Pairing, not wiring

Remotes, wall panels and the app connect over Bluetooth, Wi-Fi or Zigbee — no control cables to run.

TECHNICAL DATA

LIGHT

Power	18 W
Luminous flux	1600 lm
Colour temperature	3000–6000 K
Light colour	White adjustable
Colour rendering (CRI)	≥80
Beam angle	320°
Dimmable	Yes
Light source	Built-in LED

POWER & CONTROL

Voltage	220 V
Control	Wi-Fi/Bluetooth

DIMENSIONS

Length	1500 mm
Width	26 mm
Height	1600 mm
Number of shades	1

BUILD & ORDER

Finish	Black
Material	Aluminum
Protection	IP20
Warranty	3 years
Article	DK/EU-8060-BK
Units per box	5 pcs

WORKS WITH

TR/EU-2002-BK	Open decoration track SMART
TR/EU-2012-BK	Flush mounting track SMART
TR/EU-2100-BK	Power supply for track SMART