SMART SPOT 9 W

Tunable white track light, black

DK/EU-8308-BK · SMART SPOT ZigBee Accent Light, 9 W, 2700-6000 K, 24°, Ra90, 100-265 V AC, Aluminum, Black color



POWER **9 W**	LUMINOUS FLUX **750 lm**
COLOUR TEMPERATURE **2700–6000 K**	COLOUR RENDERING **CRI ≥ 90**
BEAM ANGLE **24°**	VOLTAGE **100-265V AC**
CONTROL **ZigBee**	PROTECTION **IP20**
DIMENSIONS **1500 × 40 × 1300 mm**	FINISH **Black**
WARRANTY **3 years**	EAN **3831166004024**

TUNABLE WHITE 2700-6000 K
Warm light for the evening, crisp daylight for work.

SMART CONTROL
ZigBee control.

BRIDGELUX LEDS, CRI ≥ 90
Colours and materials look natural.

The SPOT ZigBee series is a modern range of adjustable spotlights with a focused beam, designed for accent lighting and highlighting specific areas of an interior. Thanks to the adjustable direction, you can easily aim the light to emphasize key details or create atmospheric accents in a space. The luminaires feature built-in LEDs with dimmable brightness and a high color rendering index (Ra ≥ 90), ensuring natural and comfortable lighting.

OVERALL DIMENSIONS, MM



PART OF DENKIRS SMART

220 V, no driver

The track connects straight to the mains. No driver to size, no transformer to hide.

Four installation types

Surface, suspended, recessed in plasterboard — or SMART ONE for stretch ceilings.

Pairing, not wiring

Remotes, wall panels and the app connect over Bluetooth, Wi-Fi or Zigbee — no control cables to run.

TECHNICAL DATA

LIGHT

Power	9 W
Luminous flux	750 lm
Colour temperature	2700–6000 K
Light colour	White adjustable
Colour rendering (CRI)	≥ 90
Beam angle	24°
Dimmable	Yes
LED	LED Bridge Lux
Light source	Built-in LED
Base	Built-in LED

POWER & CONTROL

Voltage	100-265V AC
Control	ZigBee
Phases	single phase

DIMENSIONS

Length	1500 mm
Width	40 mm
Height	1300 mm
Diameter	40 mm
Cord length	1000 mm
Height adjustable	yes
Number of shades	1

BUILD & ORDER

Finish	Black
Material	Aluminum
Protection	IP20
Warranty	3 years
Article	DK/EU-8308-BK
EAN barcode	3831166004024

LIGHT

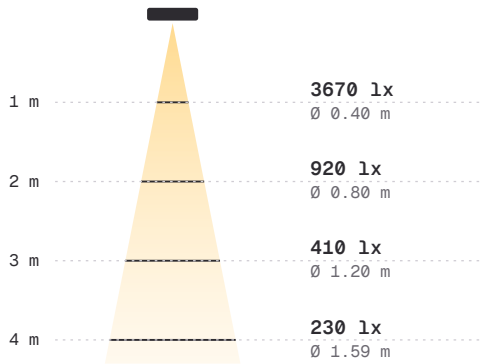

Distance · illuminance at the centre · spot diameter at half intensity.
Light distribution measured on DK/EU-8008, scaled to 750 lm.

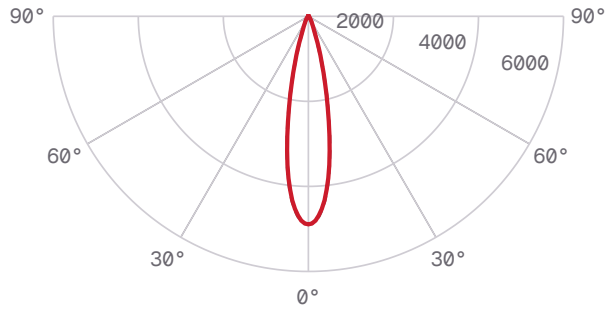

Light distribution, cd/klm: C0–C180 solid red, C90–C270 dashed.

WORKS WITH

TR/EU-2002-BK	Open decoration track SMART
TR/EU-2012-BK	Flush mounting track SMART
TR/EU-2100-BK	Power supply for track SMART