SMART SPOT 20 W

Tunable white track pendant, black

DK/EU-8320-BK · SMART SPOT ZigBee Pendant Accent Light, 20 W, 2700-6000 K, 24°, Ra90, 100-265 V AC, Aluminum, Black color



POWER **20 W**	LUMINOUS FLUX **1700 lm**
COLOUR TEMPERATURE **2700–6000 K**	COLOUR RENDERING **CRI ≥ 90**
BEAM ANGLE **24°**	VOLTAGE **100-265V AC**
CONTROL **ZigBee**	PROTECTION **IP20**
DIMENSIONS **220 × 60 × 40 mm**	FINISH **Black**
WARRANTY **3 years**	EAN **3831166004017**


TUNABLE WHITE 2700-6000 K
Warm light for the evening, crisp daylight for work.

SMART CONTROL
ZigBee control.

BRIDGELUX LEDS, CRI ≥ 90
Colours and materials look natural.

The SPOT ZigBee series is a modern range of adjustable spotlights with a focused beam, designed for accent lighting and highlighting specific areas of an interior. Thanks to the adjustable direction, you can easily aim the light to emphasize key details or create atmospheric accents in a space. The luminaires feature built-in LEDs with dimmable brightness and a high color rendering index (Ra ≥ 90), ensuring natural and comfortable lighting.

OVERALL DIMENSIONS, MM

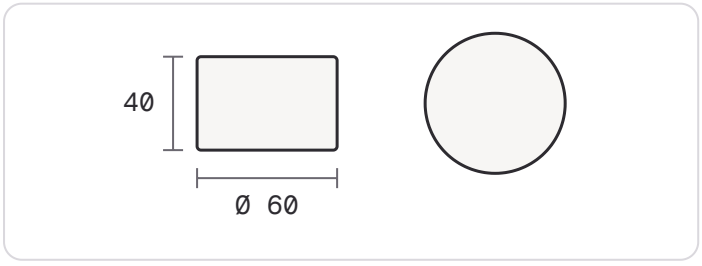

PART OF DENKIRS SMART

220 V, no driver

The track connects straight to the mains. No driver to size, no transformer to hide.

Four installation types

Surface, suspended, recessed in plasterboard — or SMART ONE for stretch ceilings.

Pairing, not wiring

Remotes, wall panels and the app connect over Bluetooth, Wi-Fi or Zigbee — no control cables to run.

TECHNICAL DATA

LIGHT

Power	20 W
Luminous flux	1700 lm
Colour temperature	2700–6000 K
Light colour	White adjustable
Colour rendering (CRI)	≥ 90
Beam angle	24°
Dimmable	Yes
LED	LED Bridge Lux
Light source	Built-in LED
Base	Built-in LED

POWER & CONTROL

Voltage	100-265V AC
Control	ZigBee
Phases	single phase


DIMENSIONS

Length	220 mm
Width	60 mm
Height	40 mm
Diameter	60 mm
Rotatable	Yes
Number of shades	1


BUILD & ORDER

Finish	Black
Material	Aluminum
Protection	IP20
Warranty	3 years
Article	DK/EU-8320-BK
EAN barcode	3831166004017
Units per box	20 pcs

LIGHT

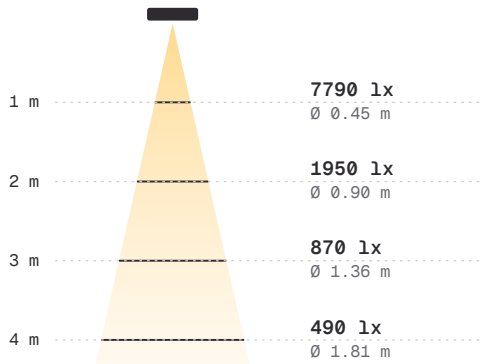

Distance · illuminance at the centre · spot diameter at half intensity.
Light distribution measured on DK/EU-8010, scaled to 1700 lm.

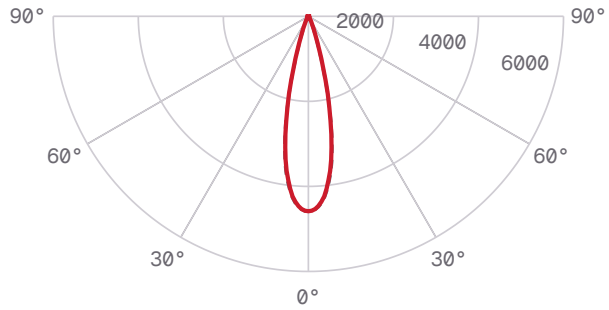

Light distribution, cd/klm: C0–C180 solid red, C90–C270 dashed.

WORKS WITH

TR/EU-2002-BK	Open decoration track SMART
TR/EU-2012-BK	Flush mounting track SMART
TR/EU-2100-BK	Power supply for track SMART