AIR LINEAR 9 W

Glare-free tunable white track light, black

DK/EU-5360-BK · Slim track light AIR LINEAR, 9W, 2700-6500K, black color



POWER **9 W**	LUMINOUS FLUX **416 lm**
COLOUR TEMPERATURE **2700–6500 K**	COLOUR RENDERING **CRI ≥ 90**
BEAM ANGLE **120°**	VOLTAGE **48 V**
CONTROL **Wi-Fi/Bluetooth**	PROTECTION **IP20**
DIMENSIONS **230 × 26 × 36 mm**	FINISH **Black**
WARRANTY **3 years**	EAN **3831166003508**

GLARE-FREE
The LEDs are recessed in the body, so the light does not dazzle.

TUNABLE WHITE 2700-6500 K
Warm light for the evening, crisp daylight for work.

SMART CONTROL
Control it from the app, by voice or from a wall panel.

CRI ≥ 90
Colours and materials look natural.

Air Smart Linear is a series of smart track lights for general lighting. Thanks to the matte diffuser, they have a wide light emission angle of 120°, which provides a high level of visual comfort and eliminates the blinding effect. OSRAM LEDs with a high color rendering index CRI>90. Fixtures click into the AIR BASE series track and lock with mechanical latches. Adjustable brightness and color temperature of 2700-6500K. Remote control via voice, app, and panel.

OVERALL DIMENSIONS, MM

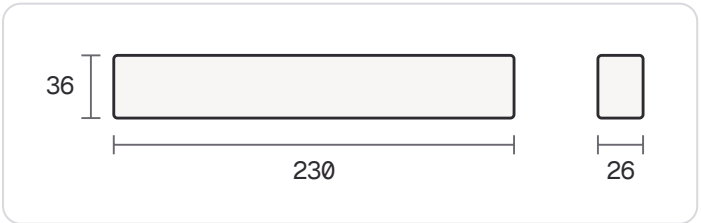

PART OF DENKIRS AIR

48 V low voltage
Safe to touch. A 150 W surface-mount driver powers the line.

Surface mounting
Fix the track onto the finished ceiling — no chasing, no recess, no re-plastering.

Click in, lock, move
Fixtures click into the track and lock with mechanical latches. Reposition them whenever the layout changes.

TECHNICAL DATA

LIGHT

Power	9 W
Luminous flux	416 lm
Colour temperature	2700–6500 K
Light colour	White adjustable
Colour rendering (CRI)	≥90
Beam angle	120°
Dimmable	Yes
Light source	Built-in LED

POWER & CONTROL

Voltage	48 V
Control	Wi-Fi/Bluetooth

DIMENSIONS

Length	230 mm
Width	26 mm
Height	36 mm

BUILD & ORDER

Finish	Black
Material	Aluminum
Protection	IP20
Warranty	3 years
Article	DK/EU-5360-BK
EAN barcode	3831166003508
Units per box	30 pcs

LIGHT

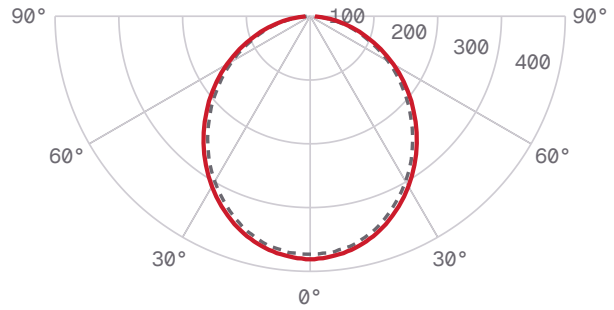

Light distribution, cd/klm: C0–C180 solid red, C90–C270 dashed.

WORKS WITH

TR/EU-5201-BK Slim track AIR BASE, 1 M, 48V DC, black color

TR/EU-5202-BK Slim track AIR BASE, 2 M, 48V DC, black color

TR/EU-5220-BK Surface mounting power unit (driver) for track AIR BASE,48V DC 150W, black color

TR/EU-5215-BK Power supply for track AIR BASE, 48V DC, black color

TR/EU-5230-BK Straight connector for track AIR BASE, black color

TR/EU-5231-BK Corner connector 90° for track AIR BASE, black color

TR/EU-5232-BK Corner connector 90° wall-ceiling for track AIR BASE, black color

TR/EU-5233-BK T-type connector for track AIR BASE, black color